


Cerradura de embutir. Frente estrecho. Canto cuadrado

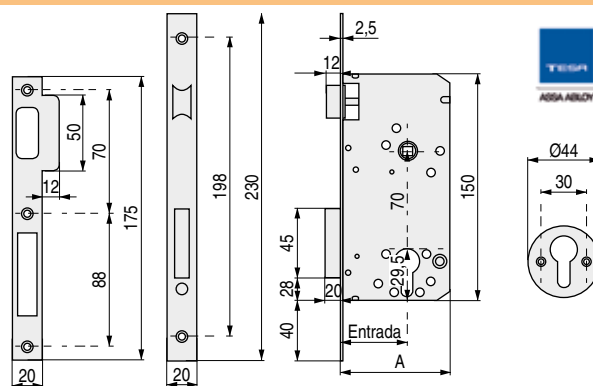

- | CÓDIGO   | Entrada | A  | Material | Acabado   |  |
|----------|---------|----|----------|-----------|-------------------------------------------------------------------------------------|
| 1321.285 | 40      | 66 | acero    | niquelado | 1 unidad                                                                            |
| 1321.105 | 40      | 66 | acero    | latonado  | 1 unidad                                                                            |
| 1321.238 | 50      | 77 | acero    | niquelado | 1 unidad                                                                            |
| 1321.104 | 50      | 77 | acero    | latonado  | 1 unidad                                                                            |

- | CÓDIGO   | Entrada | A  | Material | Acabado   |  |
|----------|---------|----|----------|-----------|---------------------------------------------------------------------------------------|
| 1321.291 | 40      | 69 | acero    | niquelado | 1 unidad                                                                              |
| 1321.51  | 40      | 69 | acero    | latonado  | 1 unidad                                                                              |
| 1321.76  | 50      | 79 | acero    | niquelado | 1 unidad                                                                              |
| 1321.56  | 50      | 79 | acero    | latonado  | 1 unidad                                                                              |

The technical drawing illustrates the ABBEY 6000 lock system from three perspectives:

- Side View (Left):** Shows the profile of the lock body with a width of 25 mm. The internal mechanism depth is 76 mm, and the total depth is 100 mm.
- Front View (Middle):** Shows the faceplate with a central rectangular window (132 mm height) and two circular mounting holes (162 mm apart). The bottom edge has a thickness of 23 mm.
- Top View (Right):** Shows the lock cylinder with a diameter of Ø44 mm. The distance between the mounting holes is 30 mm. The overall height of the assembly is 96 mm, with a base offset of 33 mm. The label "Entrada" indicates the entry point.

- | CÓDIGO          | Entrada | A  | Material | Acabado   |  |
|-----------------|---------|----|----------|-----------|---------------------------------------------------------------------------------------|
| <b>1321.290</b> | 40      | 69 | acero    | niquelado | 1 unidad                                                                              |
| <b>1321.52</b>  | 40      | 69 | acero    | latonado  | 1 unidad                                                                              |
| <b>1321.39</b>  | 50      | 79 | acero    | niquelado | 1 unidad                                                                              |
| <b>1321.118</b> | 50      | 79 | acero    | latonado  | 1 unidad                                                                              |

