


DIN 603/934 Tornillo ZINCADO  
Con tuerca




DIN 603 Tornillo ZINCADO  
Sin tuerca



ACTUALIZADO EL DÍA 22/06/2022

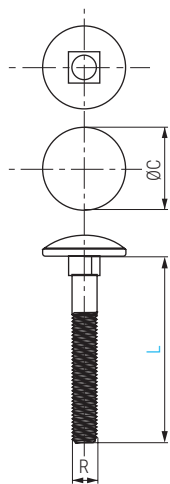

		ZINCADO	
Rosca	L LONGITUD mm.		CÓDIGO
M6 ØC 15,5	20	200	1083.193
	25	200	1083.54
	30	200	1083.55
	35	200	1083.56
	40	200	1083.57
	45	200	1083.58
M8 ØC 19,5	50	200	1083.59
	30	200	1083.82
	35	200	1083.83
	40	100	1083.84
	45	100	1083.85
	50	100	1083.86
	60	100	1083.87
	70	100	1083.88
	80	100	1083.89
	90	100	1083.90
	100	50	1083.91
	110	50	1083.92
	120	50	1083.93
	130	50	1083.94
	140	50	1083.95
150	50	1083.96	

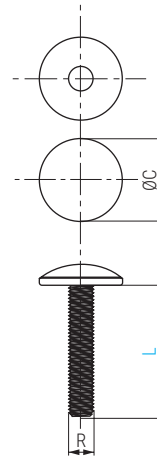


ACTUALIZADO EL DÍA 22/06/2022

- Tornillos de cuello cuadrado.
- Tuercas DIN 934 en la página 04.10.

		ZINCADO	
Rosca	L LONGITUD mm.		CÓDIGO
M6 ØC 15,5	20	100	1083.181
	25	100	1083.178
	30	350	1083.157
	35	350	1083.158
	40	250	1083.159
	45	200	1083.160
	50	250	1083.161
	55	200	1083.184
	60	200	1083.162
	70	200	1083.163
	80	200	1083.164
	90	200	1083.165
M8 ØC 19,5	100	150	1083.166
	110	100	1083.167
	120	100	1083.179
	60	400	1083.179
	70	100	1083.170
	80	100	1083.171

Tornillo para montaje de guías máquina, tipo AREA



		ZINCADO	
Rosca	L LONGITUD mm.		CÓDIGO
M4	9	1.000	9070.620